

because now matters

VIGILANT S3000


Streamlined Scalability for Growing Surveillance Needs



The Vigilant S3000 is a purpose-built 2U rackmount server designed to handle the demands of high-throughput video applications. With up to 288TB of storage, comprehensive RAID options and redundant power supplies, it ensures reliability and scalability for critical security systems. Whether managing extensive camera loads or meeting long-term retention requirements, the Vigilant S3000 delivers the performance and flexibility you need. Partner with Now Micro to reduce risk, save time, increase profits and maximize efficiency with purpose-built solutions that are backed by people who care and powered by innovation.



Every Now Micro solution comes equipped with DICE technology, offering OEMs and systems integrators a powerful suite of tools that streamlines deployment, reduces downtime with remote monitoring and simplifies asset management through a single, intuitive portal.

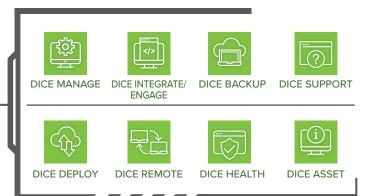

KEY FEATURES



Up to 288TB scalable storage with flexible RAID options



iDRAC Enterprise with DICE enhancements



Intel® Xeon® Silver scalable processors



Hot-swappable drives for nonstop operations



5-year global next-business-day, on-site warranty









— **POWERED BY** — **DELL**Technologies

VIGILANT S3000

System

PROCESSOR

• Intel® Xeon® Silver 4509Y Processor

OPERATING SYSTEM

- Windows Server IoT 2022 Standard
- Windows Server IoT 2019 Standard
- Windows 11 IoT Enterprise LTSC
- Windows 10 IoT Enterprise LTSC
- · Windows Server 2022 Standard
- Windows 11 Professional
- Linux

MEMORY

- 16GB Standard, Supports Up to 768GB
- 8 x DDR5 DIMM slots

CAPACITY

• Up to 288TB

RAID

• JBOD, 0, 1, 5, 6, 10

STORAGE CONTROLLERS

- BOSS Controller Card for OS Drives
- PERC H755 for Data Drives

GRAPHICS

• Matrox G200 16GB

GRAPHIC CARD OPTIONS

- NVIDIA RTX A400, 4GB, 4 x mDP
- NVIDIA RTX A1000, 8GB, 4 x mDP

I/O PORTS

Front:

- 1 x Dedicated iDRAC Micro-USB
- •1x USB 2.0
- •1x VGA

Rear:

- •1x USB 2.0
- •1x USB 3.0
- •1x VGA
- 1 x Serial (Optional Upgrade)

NETWORKING

- 2 x 1GbE RJ-45
- 4 x 1GbE RJ-45 (Via OCP Slot)
- 1 x Dedicated iDRAC Ethernet Port

EXPANSION SLOTS

- 1 x PCIE x16 (x16 Electrical), Half Height (Filled by PERC)
- 1 x PCIE x16 (x8 Electrical), Half Height (Open)
- •1x OCP x8 (Filled by OCP NIC)

NIC OPTIONS

- 4 x 1GbE RJ-45
- 2 x 10GbE RJ-45
- 2 x 25GbE SFP28

SECURITY MODULE

• Trusted Platform Module 2.0v3

HARDWARE MONITORING

- iDRAC Enterprise
- Now Micro DICE Enhancements
 Pre-Installed

WARRANTY

 5-Year Global Next-Business-Day, On-Site Warranty

Mechanical

FORM FACTOR

• 2U Rackmount

OS DRIVES

• 2 x M.2 480GB (RAID 1)

DATA DRIVES

 Up to 12 x 3.5in Enterprise Class SATA Hot Swappable Drives

POWER SUPPLY

 Dual, Hot-Plug, Redundant Power Supply (1+1), 800w

OPERATING TEMPERATURE

• 50°F to 95°F (10°C to 35°C)

OPERATING HUMIDITY

• Up to 80%, Non-Condensing

DIMENSIONS

- Height 3.417in (86.8mm)
- Width 18.976in (482mm) Includes Rack Ears
- Depth 26.99in (685.78mm) Ear to PSU Handle, Not Including Bezel

